


JPack 10 CCU

Hydraulic Power Pack

Junttan Jpacks are hydraulic power packs designed to be used with hammers, rotary heads and vibrators. Environmentally friendly features in Junttan Jpacks include sound proof housing and the possibility to use biodegradable oil in the hydraulic system. The filtering degree of return filters is about 10 µm. The new efficient diesel engines comply with EPA/CARB Stage 2 and NRMM Tier2 exhaust gas norms.

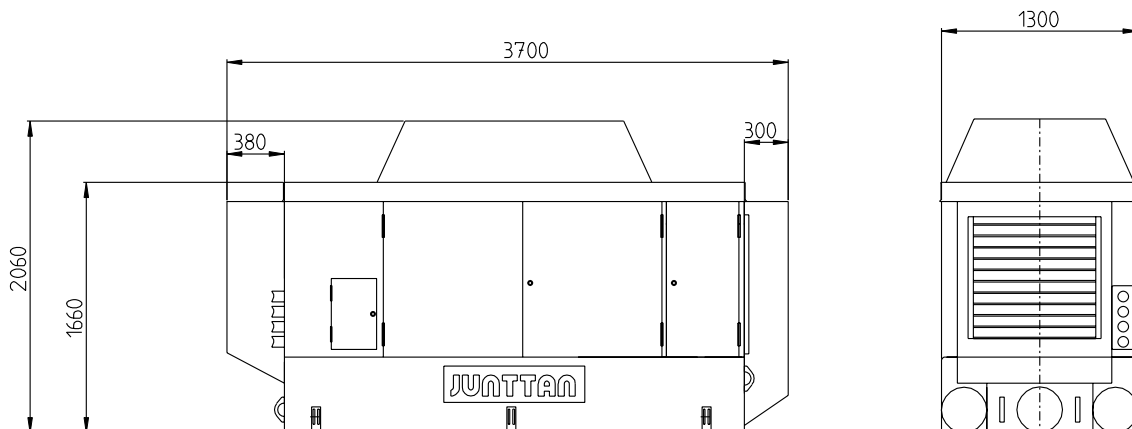

| JUNTTAN JPack 10 CCU | | |
|--|--|---------------------|
| Engine type | | Cummins QSC8.3 |
| Engine output | kW (hp) | 239 (320) |
| Pump type | Vane pump | T6ED-062-038-1R00B1 |
| Pump pressure max. | bar (PSI) | 220 (3190) |
| Pump oil flow max.at 2100 rpm | l/min (gal/m) | 650(171) |
| Fuel capacity | l (gal) | 400 (105) |
| Hydraulic oil capacity | l (gal) | 1000 (264) |
| Weight | kg (US ton) | 5 700 (6 270) |
| Suitable Junttan hammers and rotary heads | | |
| • HHK –hammers | HHK 3 – HHK 7 | |
| • HHK A-series hammers | HHK 3A – HHK 10A | |
| • HHK S-series hammers | HHK 4S – HHK 9S | |
| • Other Junttan hammers | HHK 3AL – HHK 5AL HHS 3, HHS 9 HHHK 5A – HHHK 7A | |
| • Junttan rotary heads | | |

Junttan Oy reserves the right to amend the specification without prior notice. Error and misprints reserved. July 12, 2005 - version MJPack10CCU001.