

## RH 3 X

### Options Optionen

- > Hydraulic, electric or manual shifting  
Hydraulische, elektrische oder manuelle Schaltung
- > Mounting plates  
Montageplatten
- > Flushing heads  
Spülköpfe
- > Weight reduced version  
Gewichtsreduzierte Version



X-SERIES



VIBRATION HEADS



CORING HEADS





DOUBLE HEAD DRILLING SYSTEMS



ROTARY HEADS FOR PILE RIGS



DRILLING ACCESSORIES

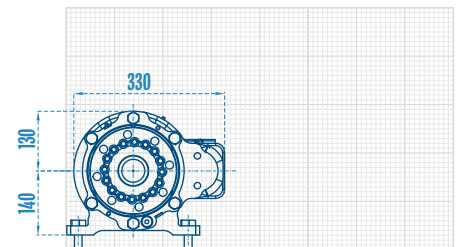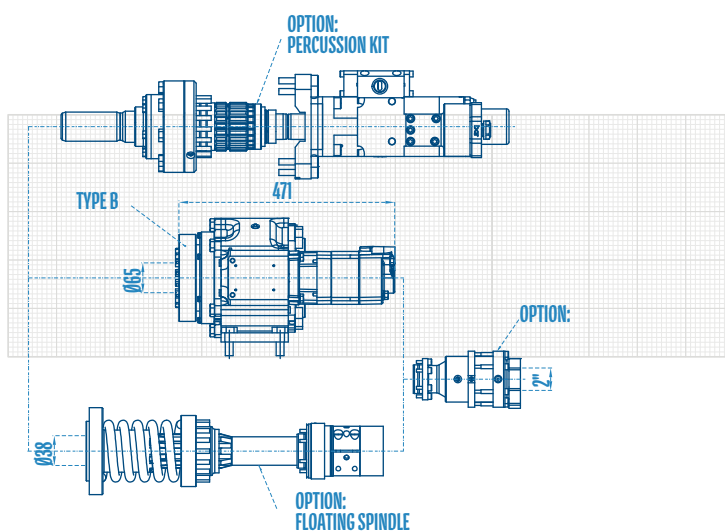

Technical Specifications are subject to modifications without prior notice and incurring responsibility for machines previously sold. The shown machines may have optional equipment. Technical data do not consider power losses. Error misprints reserved. / Technische Änderungen ohne Vorankündigung und Verpflichtung gegenüber früher gelieferten Geräten. Die abgebildeten Geräte können Sonderausstattungen haben. Technische Daten ohne Berücksichtigung des Wirkungsgrades. Irrtum und Druckfehler vorbehalten.



95 - 165 kg **Weight** Gewicht · 100 kN **Traction** Zugkraft

### Rotary mechanism RH 3 X Drehantrieb

Motor Type Motor Typ		100	103	105
Gear Gang		1	1	1
<b>Torque</b> Drehmoment	Nm	880	1650	2500
<b>Rotation</b> Drehzahl	min <sup>-1</sup>	270	145	96
p = 200 bar & Q = 75 l/min				

### Percussion unit Type 20 Schlagwerk

<b>Operating pressure</b> Arbeitsdruck	bar	160 - 200
<b>Oil capacity</b> Ölmenge	l/min	40 - 55
<b>Single blow energy</b> Einzelschlagenergie	Nm	... 320
<b>No. of blows</b> Schlagfrequenz	min <sup>-1</sup>	... 2500

### Shank adapters Einsteckenden

- > H55 LH / RH
- > H64 LH / RH & H66 / R38
- > R32, R38, R51, T38, T45 & T76, IB30, IB40 & IB52

Other shank adapters on request  
Weitere Einsteckenden auf Anfrage

### Percussion unit ED 15 Schlagwerk

<b>Operating pressure</b> Arbeitsdruck	bar	... 200
<b>Oil capacity</b> Ölmenge	l/min	... 95
<b>Percussion power</b> Schlagleistung	KW	... 15
<b>No. of blows</b> Schlagfrequenz	Hz	... 75